



## INSTALLATION DIA GRAM FOR CENTRAL-LOCKING




(Figure A)

2. When the car is originally equipped with central-locking system and the driver's door is installed with only one switch, then a two wire actuator should be installed, the wiring can be made based on the diagram below:(D)




(Figure D wiring diagram for positive trigger installation)

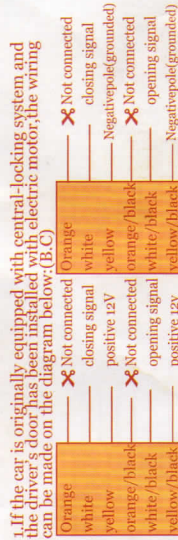

(Figure B positive triggerwiring diagram)


3. When the car is originally equipped with central-locking system (including in the driver's door), the wiring can be made based on the diagram below:(E)



(Figure E wiring diagram for positive electric circuit installation)

(Figure C Negative triggerwiring diagram)

4. When the car is originally equipped with pneumatic central-locking system, the wiring can be made based on the diagram below: (when wiring as per this diagram, please cut of the jumper at the main unit, the central-controlling time is 4 seconds):



(Figure F wiring diagram for pneumatic circuit installation)

# Keyless Entry System

## Operation description

MODEL:LB-405



## Function Operational Specification

### 1.Set(Every time effectively)

Press , lock door, Turing light flash once, siren sound one time, door lock, window output, LED flashes.

### 2.Unset(Every time effectively)

Press  once, turning light flash twice, siren sound twice, door unlock.

### 3.Trunk release(The car must have trunk motor)

- In any state, Press  for 1.5 seconds, trunk release automatically, turning light flash and siren three times.
- In any state, Press  for 1.5 seconds, trunk release automatically, turning light flash and siren three times.
- In any state, Long Press  for 1.5 seconds, trunk release automatically, turning light flash and siren three times.
- In any state, Long Press  for 1.5 seconds, trunk release automatically, turning light flash and siren three times.

### 4.Vehicle locatlor

Press  for 3 seconds, turning light flash and siren three times.

### 5.learning code

Long press learning button once, turning light flashes and siren for a long time, enter learning code state, in 10 seconds, press any button, turning light flash and siren once, if learn one more, press any button, turning light flash and siren twice, And By This Analogy, four remote control can learning at the same time.

**Note:** Turning light output time is 0.1 second, unlock/lock pneumatic is 3 second, Electric 0.5 sec, trunk 0.5sec,window output 30sec.LED 0.5 sec, siren 0.1sec.

## Specification of Electronic

### Main Unit

**Output current:** signal light:5A\*2,siren 10A,central lock 10A

**Coding:** Learning code

**Voltage:** 12±2V

**Static Current:** <12mA(except indicator, sensor)

**Frequency:** ☐315MHz ☐433.92MHz

## REMOTE CONTROL

Voltage:12V


Battery: 6V


Coding: Learning Code

Current: 15mA

Frequency: 433.92MHz

Code Times: >1 million

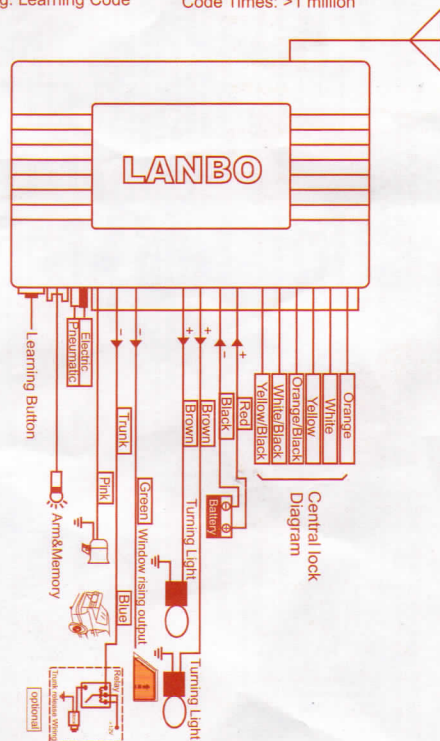

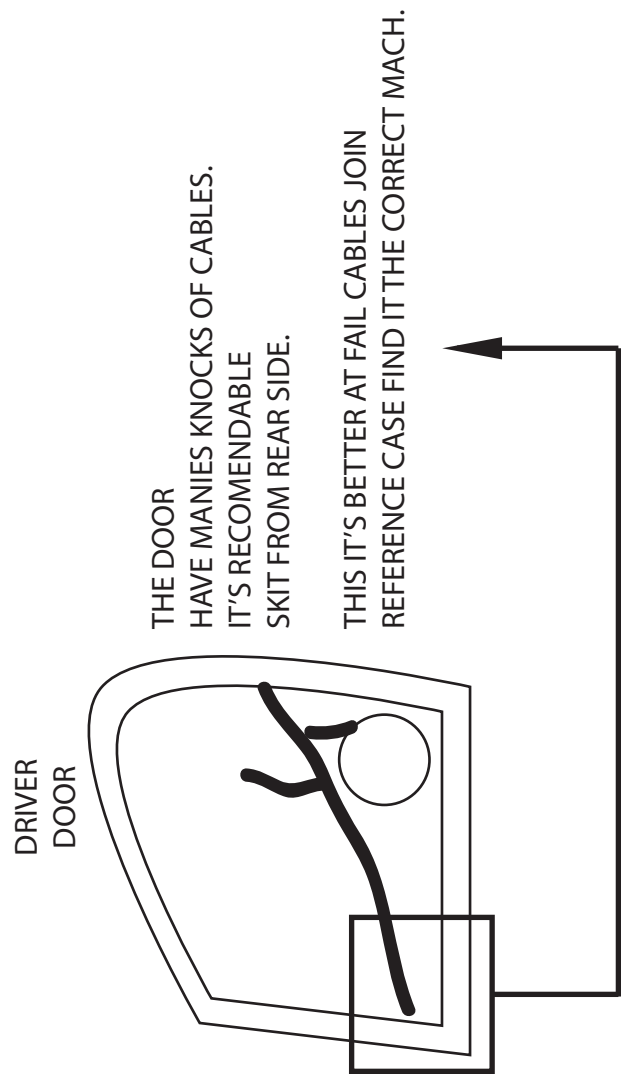

## LINK TO PURCHASE PRODUCT

[https://es.aliexpress.com/item/1005007182389993.html?spm=a2g0o.productlist.main.15.76132a7biYsTR7&algo\\_pvid=557f7f54-2dcd-49d4-bced-5a90ed8c0927&algo\\_exp\\_id=557f7f54-2dcd-49d4-bced-5a90ed8c0927-14&pdp\\_ext\\_f=%7B%22order%22%3A%22352%22%2C%22eval%22%3A%221%22%7D&pdp\\_npi=6%40dis%21EUR%2114.81%2110.31%21%21%21120.48%2183.86%21%40211b807017575242869317278e4d2c%2112000039725592868%21sea%21ES%210%21ABX%211%210%21n\\_tag%3A-29910%3Bd%3Ade0b53b6%3Bm03\\_new\\_user%3A-29895%3BpisId%3A5000000177302311&curPageLogUid=9jCVjtMmlrug&utparam-url=scene%3Asearch%7Cquery\\_from%3A%7Cx\\_object\\_id%3A1005007182389993%7C\\_p\\_origin\\_prod%3A](https://es.aliexpress.com/item/1005007182389993.html?spm=a2g0o.productlist.main.15.76132a7biYsTR7&algo_pvid=557f7f54-2dcd-49d4-bced-5a90ed8c0927&algo_exp_id=557f7f54-2dcd-49d4-bced-5a90ed8c0927-14&pdp_ext_f=%7B%22order%22%3A%22352%22%2C%22eval%22%3A%221%22%7D&pdp_npi=6%40dis%21EUR%2114.81%2110.31%21%21%21120.48%2183.86%21%40211b807017575242869317278e4d2c%2112000039725592868%21sea%21ES%210%21ABX%211%210%21n_tag%3A-29910%3Bd%3Ade0b53b6%3Bm03_new_user%3A-29895%3BpisId%3A5000000177302311&curPageLogUid=9jCVjtMmlrug&utparam-url=scene%3Asearch%7Cquery_from%3A%7Cx_object_id%3A1005007182389993%7C_p_origin_prod%3A)

